


MEGADECK® HD

PRODUCT SPECIFICATIONS

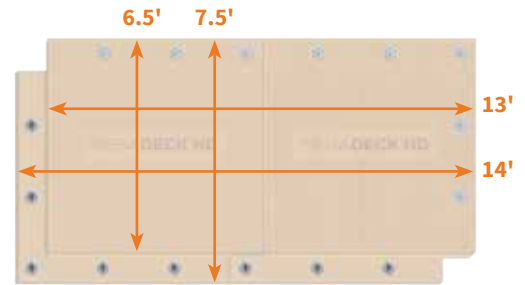

MODULE SIZE	<p>Large Mat</p> <p>Actual 7.5' (L) x 14' (W) x 4" thickness (105 sq/ft) 2.286m x 4.267m x 10.16cm (9.75 sq/m)</p> <p>Useable (due to flange) 6.5' (L) x 13' (W) x 4" thickness (84.5 sq/ft) 1.981m x 3.962m x 10.16cm (7.85 sq/m)</p>	<p>Small Mat</p> <p>Actual 7.5' (L) x 7.5' (W) x 4" thickness (56.25 sq/ft) 2.286m x 2.286m x 10.16cm (5.23 sq/m)</p> <p>Useable (due to flange) 6.5' (L) x 6.5' (W) x 4" thickness (42.25 sq/ft) 1.981m x 1.981m x 10.16cm (3.93 sq/m)</p>
WEIGHT	<p>Large Mat: 1,092 lbs (495.3 kg)</p> <p>Small Mat: 543 lbs (246.3 kg)</p>	
FLANGE THICKNESS	2" (5.08cm)	
COLOR	Beige. Custom colors available.	
MATERIAL	High-Density Polyethylene (HDPE) with special impact modifiers and fillers to accommodate thermal expansion, incorporate UV resistance, and add anti-static properties.	
WEIGHT LOADING	600 psi	
FLAMMABILITY RESISTANCE	UL94HB	
GROUND SURFACE	Designed to be used with no ground preparation over grass, mud, sand, dirt, and other common on-site substances.	
CONNECTION SYSTEM	Proprietary, self-aligning, aluminum cam lock system. Connects the overlapping flange from adjacent mats with a simple twist of a standard hex key.	
COMPATIBILITY	100% compatible with original MegaDeck and can connect with other composite matting systems (please inquire).	
CONSTRUCTION FEATURES	<ul style="list-style-type: none"> • Integrated design prevents fluid saturation of mat • Enhanced traction • Dual-sided tread 	
SHIPPING INFO	<p>U.S. Standard Truck: 40 mats</p> <p>40ft ISO shipping container: 40 mats</p> <p>20ft ISO shipping container: 20 mats – 1 stack, 20 full mats high</p>	

North Regional Office | 900 Patterson Drive, Bloomsburg, PA 17815 **(888) 496-3625**

Southeast Regional Office | 1490 Westfork Drive, Suite A, Lithia Springs, GA 30122 **(770) 947-5103**

Southwest Regional Office | 2001 Brennan Avenue, Fort Worth, TX 76106 **(817) 624-0007**

Mid-Atlantic Regional Office | 7100 Holladay Tyler Road, Suite 234, Glenn Dale, MD 20769 **(888) 496-3625**

Florida Regional Office | 1890 West Atlantic Avenue, Delray Beach, FL 33444 **(954) 984-4494**



Valtir.com