

King MASH Composite Block[®]

FOR 8" GUARDRAIL APPLICATIONS



MASH

King MASH Composite Block® For 8" Guardrail Applications

King MASH Composite Blocks® are injection molded guardrail offset blocks composed of Recycled High Density Polyethylene (HDPE) and tested to AASHTO's MASH, 2nd Edition (2016), Test Level 3 specifications.

The King MASH Composite Block® is offered as an alternative to 8" (200 mm) depth wood blocks on W-Beam guardrail systems, utilizing standard W6x8.5# / 9# (W150x12.6 kg / 13.5 kg) steel posts.



FEATURES


- Eligible for reimbursement under the Federal-aid highway program, per FHWA letter HSST-1/B-342, dated 3 June 2020, as a MASH 2016 device.
- Self-hanging fingers.
- Self-aligning side rails.
- Lightweight - only 4.6 lbs. (2.1 kg)
- Weighs less than other 8" MASH blocks.
- Bottom tab supports rail during installation.

ASSEMBLY AND MAINTENANCE

- Self-hanging fingers minimize the need for assistance by end-users during installation.
- Self-aligning side rails are designed to hold block in place and resist rotation.
- King Blocks are designed to retain their original size over time, which helps reduce the frequency of retightening guardrail post bolts.
- Formulated with UV inhibitors, to reduce long-term degradation.
- Weather-resistant materials minimize damage related to rain, snow, and extreme cold/heat.
- Blocks are composed of durable materials resulting in less damage by ongoing roadway operations - such as snowplowing and mowing.
- HDPE offers superior resistance to solvents, alcohols, acids and alkalis.

SPECIFICATIONS

- 4"W x 14"L x 7.5"D, 4.6 lbs. (2.1 kg)
(100 mm x 350 mm x 190 mm)

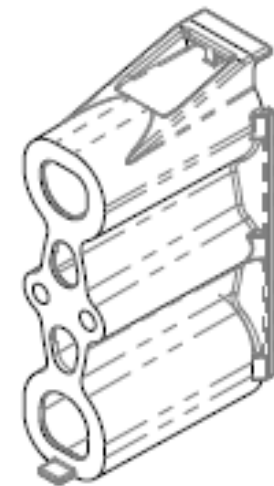

DISTRIBUTED BY